


PRO

SPECIFICATION SHEET

GENERAL

| | |
|-------------------|--|
| Top layer | Thickness: 0.6 mm |
| Dimensions | Length: 1203 mm (47-3/8 inch) |
| | Width: 190 mm (7-1/2 inch) |
| | Thickness: 7.2 mm (9/32 inch) |
| Core | High Density Fibreboard (HDF) |
| Bevels | 4 bevels (4x mini) |
| Gloss | Super matt (3% +/-1) |
| Structure | Brushed |
| Backing | Real wood |
| Density | 900 kg/m ³ |
| Weight/sqm | 7.5 kg |
| Connection system | Uniclic® |
| Installation | Floating |
| Standard colours | Natural Oak premium, Natural Oak rustic light, Ivory Oak premium, Ivory Oak rustic light, Milk Oak premium, Silk Oak rustic light, Desert Oak premium, Sahara Oak premium, Burley Oak rustic light, Smoked Walnut premium Other colours on demand |

PRODUCT COMPOSITION

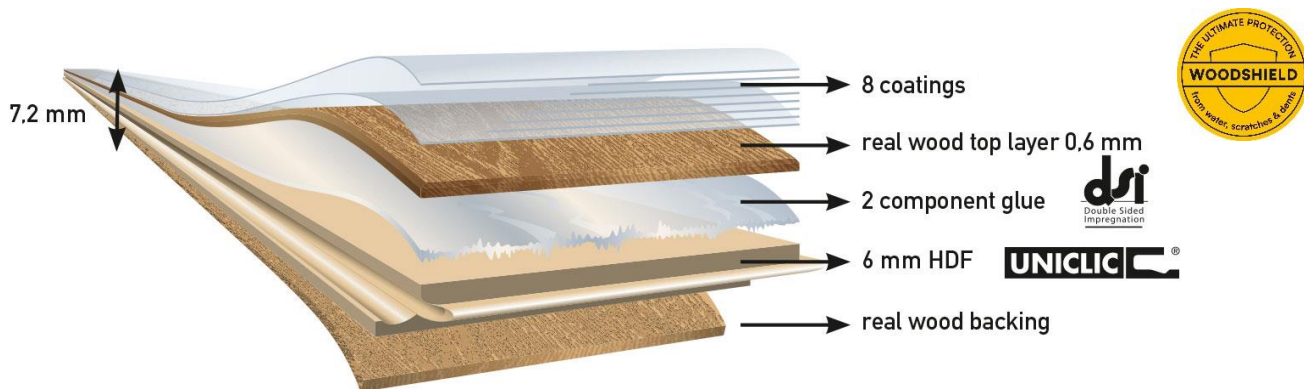

PACKAGING


| | |
|--------|--|
| Box | 11 boards - surface 2.514 m ² (27.06 sq.ft) - gross weight 16.3 kg (35.9 lbs) |
| Pallet | 65 boxes - surface 163.43 m ² (1759 sq.ft) - gross weight 1074 kg (2368 lbs) |

TECHNICAL SPECIFICATIONS

| | |
|----------------------------------|---|
| Domestic Usage Classification | 23 |
| Commercial Usage Classification | 31 |
| CE Certification | EN14342 |
| Warranty | Residential use: 15 years Light commercial use: 5 years |
| Formaldehyde Emission | E1 |
| PCP | PCP free |
| Underfloor heating | High suitability, with a thermal resistance of 0.053m ² K/w there is a minimal waste of energy (cf instructions) |
| Underfloor cooling | Suitable (cf instructions) |
| Thermal resistance | 0.053m ² K/W |
| Thermal conductivity | 0.14W/mK |
| Fire reaction & Smoke generation | Cfl-s1 |
| Sustainability | PEFC certified (FSC® certification on demand) |
| Maintenance | Weekly cleaning with 'Parky wood floor cleaner' |



Eurofins Product Testing

| | | |
|-------------------------------|--|--|
| French VOC Regulation |  | Degree of March 2011 (Dev1101903D) and Arrêté of April 2011 (DEVL 1104875A) modified in February 2012 (DEVL1133129A) |
| French CMR components | Pass | Regulation of April and May 2009 (DEVPO908633A and DEVPO910046A) |
| Italian CAM Edilizia | Pass | DM 23 giugno 2022 n. 256, GURI n. 183 del 6 agosto 2022 |
| ABG/AgBB | Pass | Ausschuss zur gesundheitlichen Bewertung von Bauprodukten (June 2021) |
| Belgian Regulation | Pass | Royal decree of May 2014 (C-2014/24239) |
| Indoor Air Comfort | Pass | Indoor Air Comfort 9.0 of June 2023 |
| Indoor Air Comfort Gold | Pass | Indoor Air Comfort GOLD 9.0 of June 2023 |
| BREEAM International | Exemplary level | BREEAM International New Construction v.6.0 (2021) |
| BREEAM NOR | Exemplary level | BREEAM-NOR v.6.1 New Construction (2023) |
| EU Taxonomy | Pass | Regulation (EU) 2020/852 of the European Parliament and of the Council |
| LEED v4.1 BETA (outside U.S.) | Pass | LEED v4.1 BETA for Building Design and Construction (February 2024) |



PARKY®

wood flooring's finest

Decospan nv, Industriezone Grensland
Lageweg 33, 8930 Menen — Belgium
tel. +32 56 52 88 49 — info@par-ky.com
www.par-ky.com

DECOSPAN.

This version supersedes all previous versions.

01.10.2024