


General

Top layer	Thickness: 0.6mm (1/32 inch)
Dimensions	Length: 1203mm (47 23/64 inch)
	Width: 190mm (7 31/64 inch)
	Thickness: 7.2mm (9/32 inch)
Core	High Density Fibreboard (HDF)
Bevel	Brushed: 4 bevels (4x0.5mm) – Sealed: 4 bevels (2x0.5mm +2x0.1mm)
Gloss	Brushed: Matt (10) – Sealed: Satin (20)
Structure	Brushed – Sealed
Backing	Real Wood
Density	>950kg/m³
Weight/sqm	7kg
Connection System	Uniclic
Installation type	Floating
Standard Colors	<u>Trendy Oaks</u> : European, Ivory, Umber, Milk, Desert, Clay, Manhattan, Antique, Chocolate
	<u>Character Woods</u> : Smoked Walnut, Teak, Jatoba

Product composition

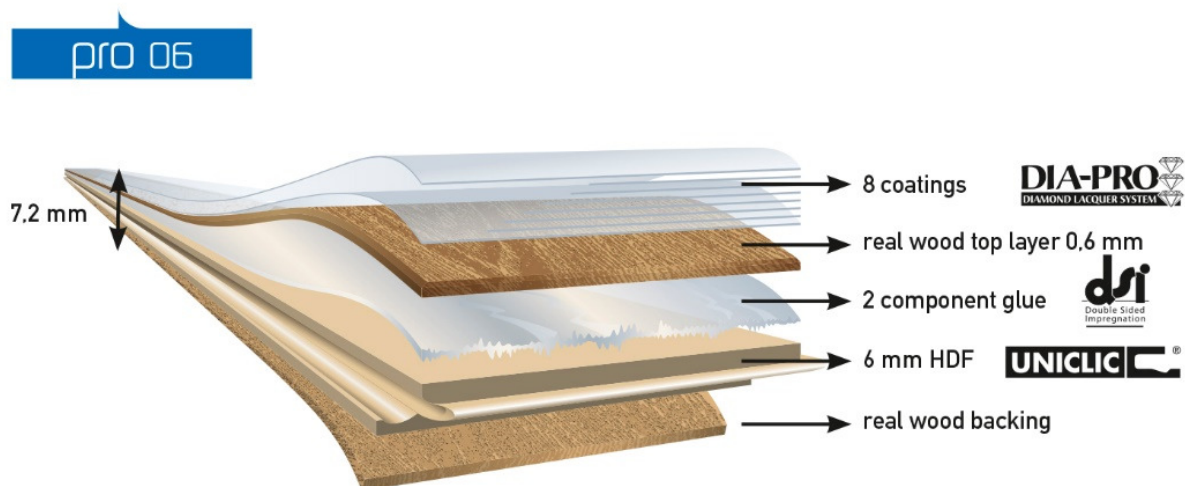

Technical specifications

Domestic Usage Classification	23
Commercial Usage Classification	31
CE Certification	EN14342:2013
Warranty	Brushed: 15 years – Sealed 20 years
Formaldehyde Emission	E1
PCP	PCP free
Underfloor heating	High suitability, with a thermal resistance of 0.043m²K/W there is a minimal waste of energy.
Thermal resistance	0,043m²K/W
Thermal conduction	0,203W/mK
Fire reaction & smoke generation	Cfl-s1
Maintenance	Weekly cleaning with 'Par-ky wood floor cleaner'

Packaging

Box	11 boards Surface 2,514m² (27.06 sq.ft) Gross weight 16,3kg (35.94 lbs)
Pallet	65 boxes Surface 163,41m² (1758.93 sq.ft) Gross weight 1073,5kg (2366.66 lbs)

