


## General

Toplayer	Thickness: 0.6mm (1/32 inch)
Dimensions	Length: 1203mm (47 23/64 inch) Width: 124mm (4 7/8 inch) Thickness: 8.3mm (21/64 inch)
Core	High Density Fibreboard (HDF)
Bevel	Brushed: 4 bevels (4x0.5mm) – Sealed: 2 bevels (2x0.5mm)
Gloss	Brushed: Matt (10) – Sealed: Satin (20)
Structure	Brushed– Sealed
Backing	Real wood
Density	>950kg/m³
Weight/sqm	8kg
Connection system	Uniclic
Installation type	Floating
Standard colors	<u>Trendy Oaks</u> : European, Ivory, Umber, Milk, Desert, Clay, Manhattan, Antique, Chocolate <u>Character Woods</u> : Sand Ash, Golden Ash, Wengé, Afzelia Doussé, Smoked Walnut, Coffee Beech, Sucupira, Teak, Shadow Macassar, Rosewood Santos, Bamboo Steamed, Jatoba

## Product composition

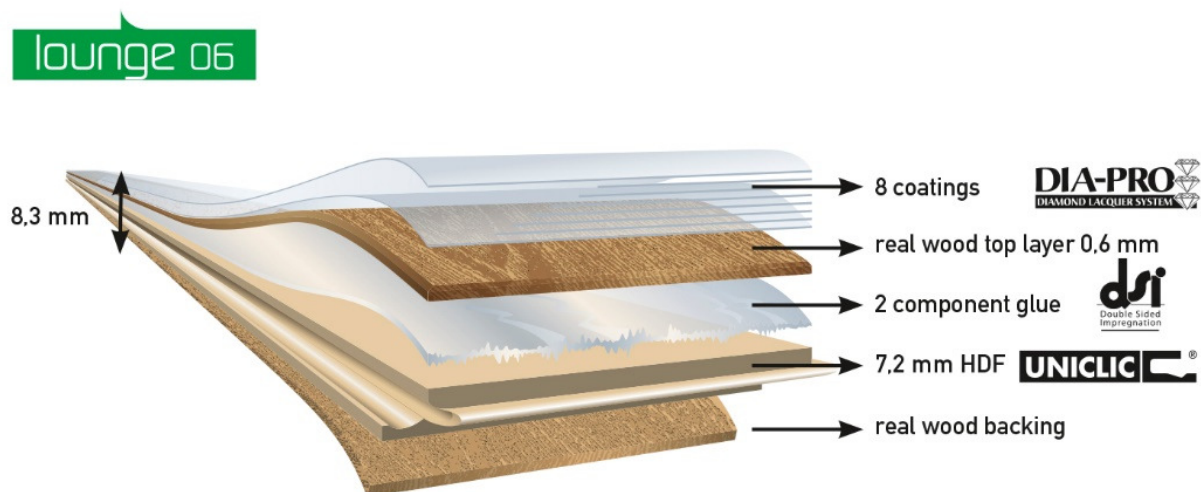

## Technical specifications

Domestic Usage Classification	23
Commercial Usage Classification	31
CE Certification	EN14342:2013
Warranty	Brushed: 15 years – Sealed 20 years
Formaldehyde Emission	E1
PCP	PCP free
Underfloor heating	High suitability, with a thermal resistance of 0.0493m <sup>2</sup> K/w there is a minimal waste of energy.
Thermal resistance	0,0493m <sup>2</sup> K/W
Thermal conduction	0,203W/mK
Fire reaction & smoke generation	Bfl-s1
Maintenance	Weekly cleaning with 'Par-ky wood floor cleaner'

## Packaging

Box	11 boards Surface 1,641m <sup>2</sup> (17.66 sq.ft) Gross weight 11,75kg (25.90 lbs)
Pallet	77 boxes Surface 126,36m <sup>2</sup> (1360.13 sq.ft) Gross weight 918,75kg (2025.50 lbs)

