


General

Toplayer	Thickness: 0.6mm (1/32 inch)
Dimensions	Length: 1800mm (70 55/64 inch)
	Width: 166mm (6 17/32 inch)
	Thickness: 12mm (21/64 inch)
Core	High Density Fibreboard (HDF)
Bevels	Brushed: 4 bevels (2x1.5mm + 2x0.5mm)
	Sealed: 4 bevels (2x1.5mm + 2x05.mm)
Gloss	Brushed: Matt (10) – Sealed: Satin (20)
Structure	Brushed– Sealed
Backing	Real wood + Cork
Density	>850kg/m³
Weight/sqm	10kg
Connection system	Uniclic
Installation type	Floating
Standard Colors	<u>Trendy Oaks</u> : European, Ivory, Umber, Milk, Desert, Clay, Manhattan, Antique, Chocolate
	<u>Character Woods</u> : Sand Ash, Smoked Walnut, Sucupira, Teak, Shadow
	Macassar, Rosewood Santos

Product composition

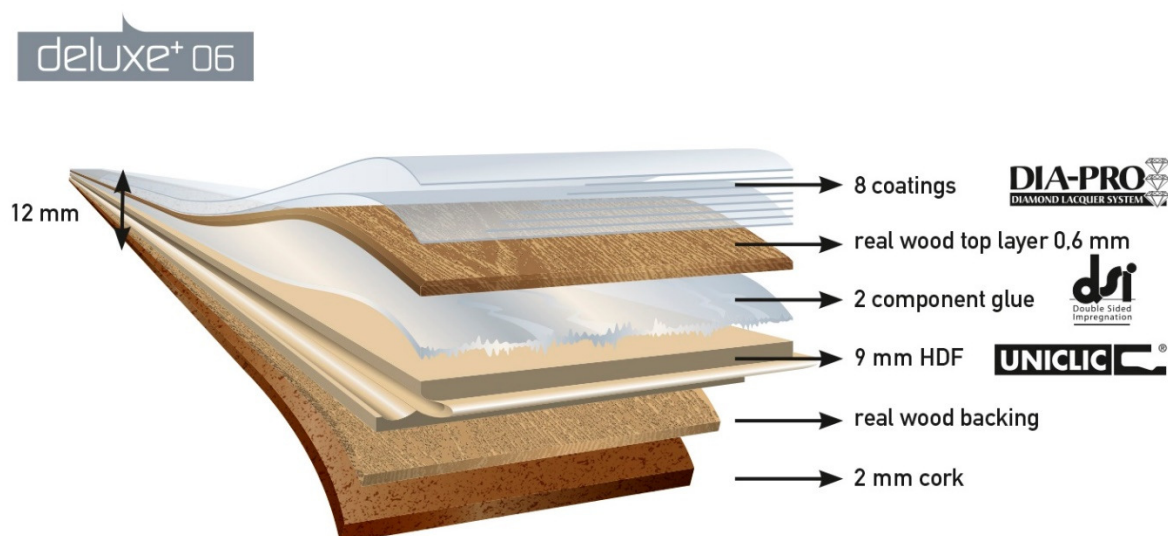

Technical specifications

Domestic Usage Classification	23
Commercial Usage Classification	31
CE Certification	EN14342:2013
Warranty	Brushed: 15 years – Sealed 20 years
Formaldehyde Emission	E1
PCP	PCP free
Underfloor heating	High suitability, with a thermal resistance of 0.0820m²K/w there is a minimal waste of energy.
Thermal resistance	0,0820m²K/W
Thermal conduction	0,122W/mK
Fire reaction & Smoke generation	Cfl-s1
Maintenance	Weekly cleaning with 'Par-ky wood floor cleaner'

Packaging

Box	7 boards Surface 2,092m² (22.52 sq.ft) Gross weight 18,5kg (41.79 lbs)
Pallet	66 boxes Surface 138,07m² (1486.17 sq.ft) Gross weight 1243kg (2740.35 lbs)

