


## General

Toplayer	Thickness: 0.6mm (1/32 inch)
Dimensions	Length: 868mm (34 11/64 inch) Width: 124mm (4 7/8 inch) Thickness: 12mm (15/32 inch)
Core	High Density Fibreboard (HDF)
Bevel	Brushed: 4 bevels (4x0.5mm) – Sealed: 4 bevels (4x0.5mm)
Gloss	Brushed: Matt (10) – Sealed: Satin (20)
Structure	Brushed – Sealed
Backing	Real wood + Cork
Density	>950kg/m³
Weight/sqm	10kg
Connection System	Uniclic
Installation type	Floating
Standard Colors	<u>Trendy Oaks</u> : European, Ivory, Desert, Antique <u>Character Woods</u> : Smoked Walnut, Teak

## Product composition

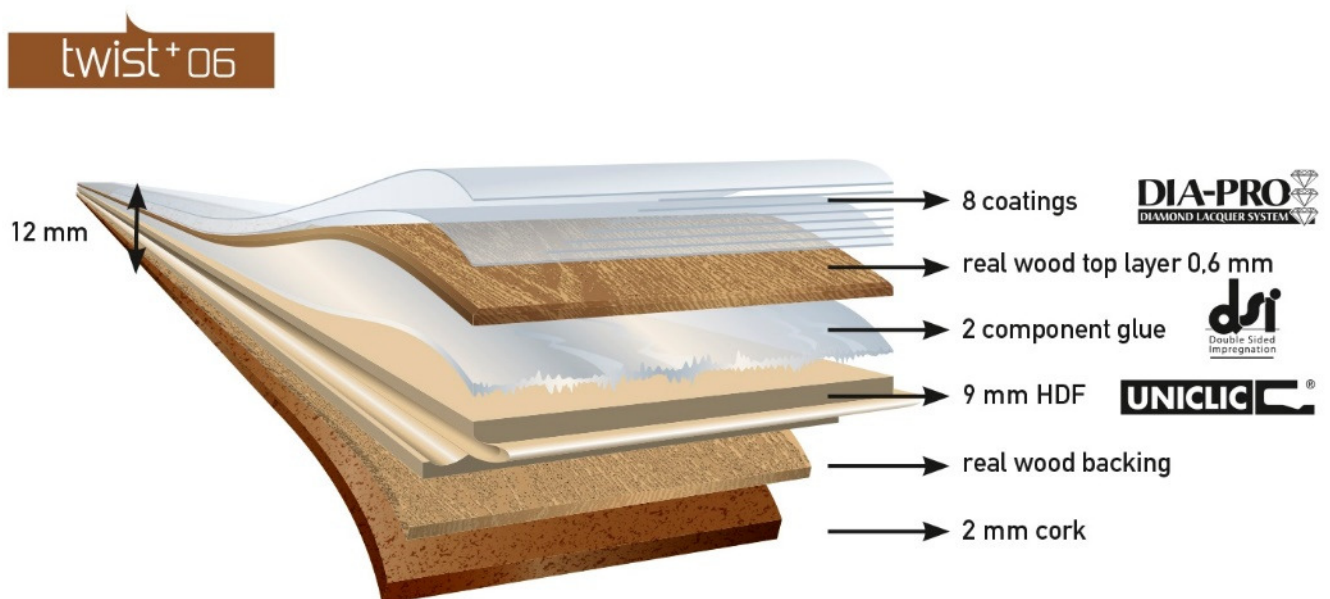

## Technical specifications

Domestic Usage Classification	23
Commercial Usage Classification	31
CE Certification	EN14342:2013
Warranty	Brushed: 15 years – Sealed 20 years
Formaldehyde Emission	E1
PCP	PCP free
Underfloor heating	High suitability, with a thermal resistance of 0.0820m <sup>2</sup> K/w there is a minimal waste of energy.
Thermal resistance	0,0820m <sup>2</sup> K/W
Thermal conduction	0,122W/mK
Fire reaction & Smoke generation	Cfl-s1
Maintenance	Weekly cleaning with 'Par-ky wood floor cleaner'

## Packaging

Box	9 boards Surface 0,969m <sup>2</sup> (10.43 sq.ft) Gross weight 8,75kg (19.29 lbs)
Pallet	72 boxes Surface 69,77m <sup>2</sup> (751 sq.ft) Gross weight 640kg (1410.96 lbs)

