


### General

Toplayer	Thickness: 2mm (5/64 inch)
Dimensions	Length: 1935mm (76 1/8 inch)
	Width: 150mm (5 29/32 inch)
	Thickness: 10mm (25/64 inch)
Core	High Density Fibreboard (HDF)
Bevel	2 bevels (2x0.5mm)
Gloss	Matt (10)
Structure	Brushed
Backing	Real wood
Density	>850kg/m³
Weight/sqm	8kg
Connection system	Uniclic
Installation type	Floating
Standard Colors	<u>Trendy Oaks</u> : European, Ivory, Umber, Milk, Desert

### Product composition

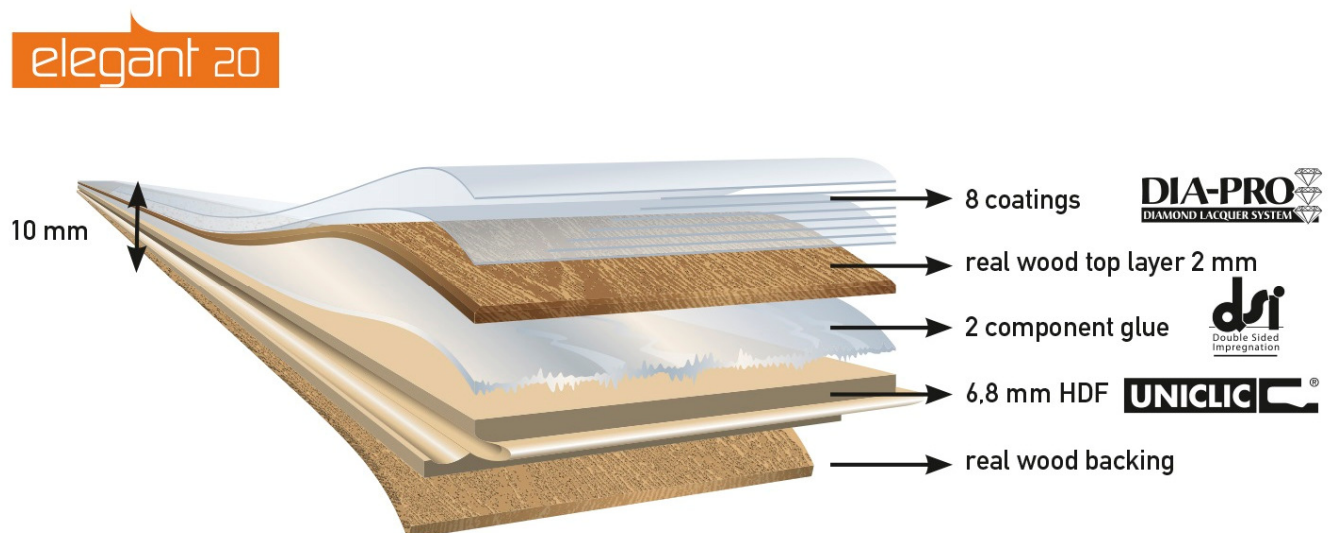

## Technical specifications

Domestic Usage Classification	22
Commercial Usage Classification	31
CE Certification	EN14342:2005+A1:2008
Warranty	15 years
Formaldehyde Emission	E1
PCP	PCP free
Underfloor heating	ok but glued
Thermal resistance	0,07m <sup>2</sup> K/W
Thermal conduction	0,15W/mK
Fire reaction & smoke generation	Dfl-s1
Maintenance	Weekly cleaning with 'Par-ky wood floor cleaner'

## Packaging

Box	7 boards
	Surface 2,032m <sup>2</sup> (21.87 sq.ft)
	Gross weight 16,5kg (36.38 lbs)
Pallet	60 boxes
	Surface 121,92m <sup>2</sup> (1312.36 sq.ft)
	Gross weight 1010kg (2226.67 lbs)

