


General

Toplayer	Thickness: 3.2mm (1/8 inch)
Dimensions	Length: 1184mm (46 39/64 inch)
	Width: 148mm (5 53/64 inch)
	Thickness: 14mm (9/16 inch)
Core	High Density Fibreboard (HDF)
Bevels	2 bevels (2x0.5mm)
Gloss	Matt (10)
Structure	Brushed
Backing	Real wood
Density	>850kg/m³
Weight/sqm	12kg
Connection system	Uniclic
Installation type	Floating
Standard colors	<u>Trendy Oaks</u> : European, Ivory, Umber, Milk, Desert

Product composition

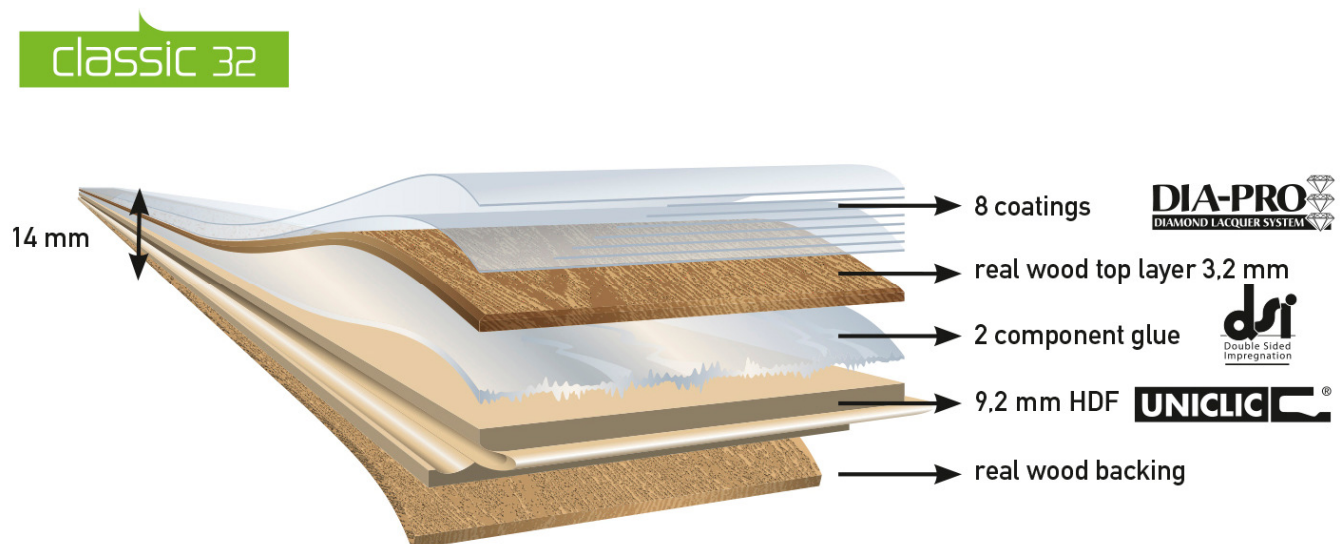

Technical specifications

Domestic Usage Classification	23
Commercial Usage Classification	31
CE Certification	EN14342:2005+A1:2008
Warranty	15 years
Formaldehyde Emission	E1
PCP	PCP free
Underfloor heating	ok but glued
Thermal resistance	0,07m²K/W
Thermal condition	0,15W/mK
Fire reaction & smoke generation	Dfl-s1
Maintenance	Weekly cleaning 'Par-ky wood floor cleaner'

Packaging

Box	7 boards
	Surface 1,227m² (13.21 sq.ft)
	Gross weight 13,50kg (29.76 lbs)
Pallet	60 boxes
	Surface 73,62m² (792.44 sq.ft)
	Gross weight 830kg (1829.84 lbs)

