


Swing 06

General

Top layer	Thickness: 0.6mm (1/32 inch)
Dimensions	Length: 595mm (23,4 inch)
	Width: 121mm (4,8 inch)
	Thickness: 10mm (3/8 inch)
Core	High Density Fibreboard (HDF)
Bevel	4 bevels (4x0.5mm)
Gloss	Brushed: Matt (10) – Sealed: Satin (20)
Structure	Brushed – Sealed
Backing	Real Wood
Density	>850kg/m³
Weight/sqm	7kg
Connection System	Unifit X
Installation type	Floating
Standard Colors	<u>Trendy Oaks</u> : European, Ivory, Desert
	<u>Character Woods</u> : Smoked Walnut

Product composition

Swing 06

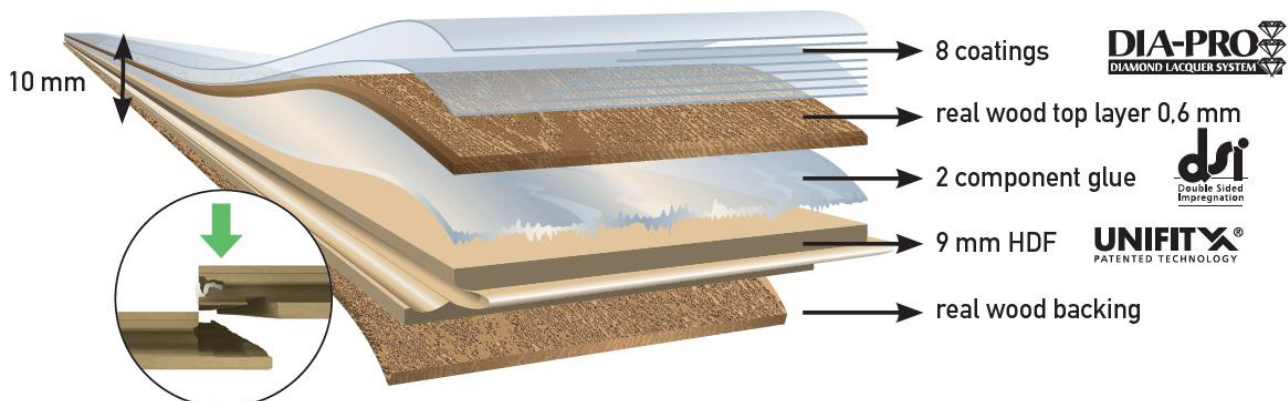

Technical specifications

Domestic Usage Classification	23
Commercial Usage Classification	31
CE Certification	EN14342:2013
Warranty	Brushed: 15 years – Sealed 20 years
Formaldehyde Emission	E1
PCP	PCP free
Underfloor heating	High suitability, with a thermal resistance of 0.07m ² K/W there is a minimal waste of energy
Thermal resistance	0,073m ² K/W
Thermal conduction	0,14W/mK
Fire reaction & smoke generation	Cfl-s1
Maintenance	Weekly cleaning with 'Par-ky wood floor cleaner'

Packaging

Box	11 boards Surface 0,792m ² (8.5 sq.ft) Gross weight 6,9kg (15 lbs)
Pallet	126 boxes Surface 99,79m ² (1074 sq.ft) Gross weight 883,4kg (1948 lbs)

