


General

Top layer	Thickness: 0.6mm
Dimensions	Length: 868,7mm
	Width: 124,1mm
	Thickness: 12mm
Core	High Density Fibreboard (HDF)
Bevel	4 bevels
Gloss	10-20-40% depending on wood specie
Structure	Brushed-sealed depending on wood specie
Backing	Real Wood + cork
Density	850kg/m ³
Weight/sqm	10kg
Connection System	Uniclic
Installation type	Floating
Standard Colors	European Oak, Desert Oak, Manhattan Oak, Antique Oak
	Smoked Walnut, Teak, Wengé , Jatoba, Sapelli, Sucupira, Ebony, Saima Natural, Saima Light Brown, Saima Silver Grey, Saima Medium Grey

Product composition

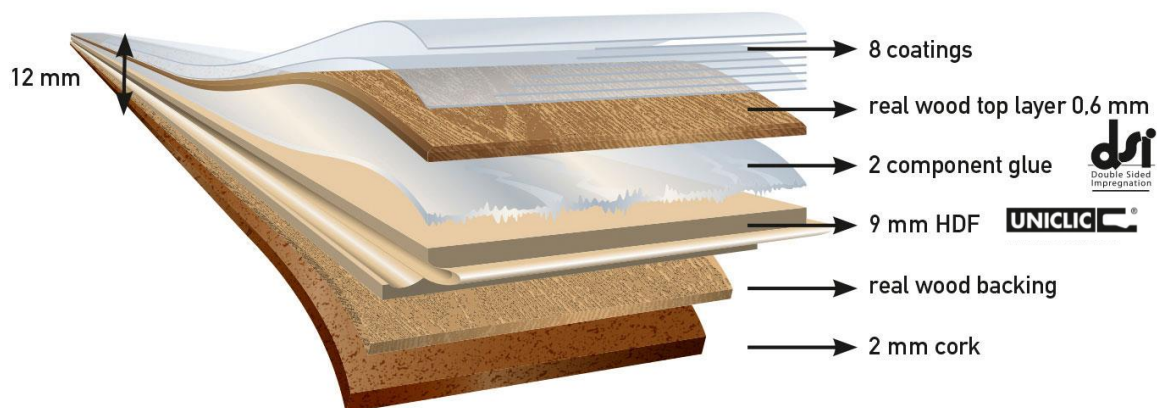

Technical specifications

Domestic Usage Classification	23
Commercial Usage Classification	31
CE Certification	EN14342:2013
Warranty	Residential use: 15 years Low commercial use: 5 years
Formaldehyde Emission	E1
PCP	PCP free
Underfloor heating	High suitability, with a thermal resistance of 0.109m ² K/W there is a minimal waste of energy
Thermal resistance	0,109m ² K/W
Thermal conduction	0,11W/mK
Fire reaction & smoke generation	Cfl-s1
Maintenance	Weekly cleaning with 'Parky wood floor cleaner'

Packaging

Box	9 boards Surface 0,970 m ² Gross weight 8,75 kg
Pallet	72 boxes Surface 69,77 m ² Gross weight 640 kg

