


PRO

LASTENBOEKTEKST

ALGEMEEN

Toplaag	Dikte: 0.6 mm
Afmetingen	Lengte: 1203 mm (47-3/8 inch) Breedte: 190 mm (7-1/2 inch) Dikte: 7.2 mm (9/32 inch)
Drager	High Density Fibreboard (HDF)
V-groeven	4 v-groeven (4x mini)
Glans	Super mat (3% +/-)
Structuur	Geborsteld
Tegenlaag	Echt hout
Densiteit	900 kg/m ³
Gewicht/m ²	7.5 kg
Kliksysteem	Uniclic [®]
Installatiemethode	Zwevend
Standaard kleuren	Natural Oak premium, Natural Oak rustic light, Ivory Oak premium, Ivory Oak rustic light, Milk Oak premium, Silk Oak rustic light, Desert Oak premium, Sahara Oak premium, Burley Oak rustic light, Smoked Walnut premium Andere kleuren op aanvraag

PRODUCTOPBOUW

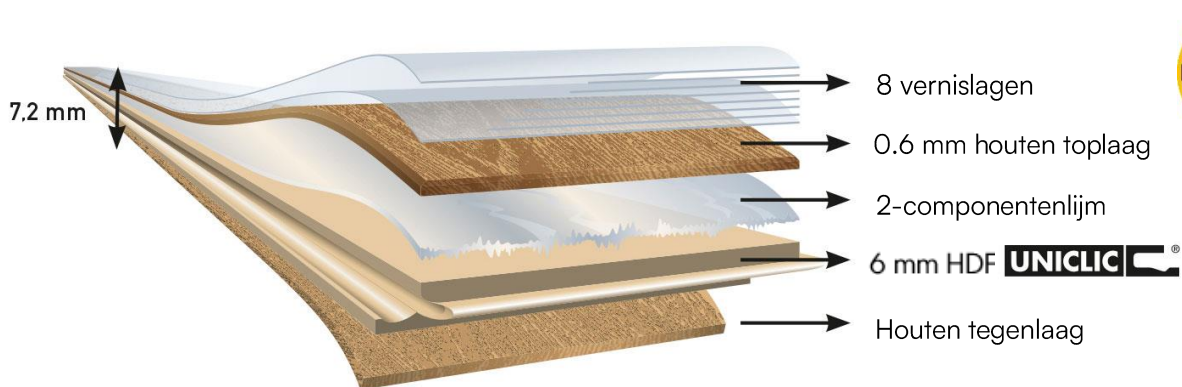

VERPAKKING

Doos	11 planken - oppervlakte 2.514 m ² (27.06 sq.ft) - bruto gewicht 16.3 kg (35.9 lbs)
Pallet	65 dozen - oppervlakte 163.43 m ² (1759 sq.ft) - bruto gewicht 1074 kg (2368 lbs)

TECHNISCHE SPECIFICATIES

Huishoudelijke gebruiksklasse	23
Commerciële gebruiksklasse	31
CE Certificatie	EN14342
Garantie	Residentieel gebruik: 15 jaar Licht commercieel gebruik: 5 jaar
Formaldehyde-emissie	E1
PCP	≤ 5 ppm
Vloerverwarming	Geschikt
Vloerkoeling	Geschikt
Warmtedoorgangsweerstand	0.053 m²K/W
Warmtegeleidbaarheid	0.14 W/mK
Rookontwikkeling en brandveiligheid	Cfl-s1
Goed beheerde bossen	PEFC gecertificeerd (FSC® certificatie op aanvraag)
Onderhoud	Wekelijks onderhoud met 'Parky wood floor cleaner'



Eurofins Product Testing

French VOC Regulation



Degree of March 2011 (Dev1101903D) and Arrêté of April 2011 (DEVL 1104875A) modified in February 2012 (DEVL1133129A)

French CMR components

Pass

Regulation of April and May 2009 (DEVP0908633A and DEVP0910046A)

Italian CAM Edilizia

Pass

DM 23 giugno 2022 n. 256, GURI n. 183 del 6 agosto 2022

ABG/AgBB

Pass

Ausschuss zur gesundheitlichen Bewertung von Bauprodukten (June 2021)

Belgian Regulation

Pass

Royal decree of May 2014 (C-2014/24239)

Indoor Air Comfort

Pass

Indoor Air Comfort 9.0 of June 2023

Indoor Air Comfort Gold

Pass

Indoor Air Comfort GOLD 9.0 of June 2023

BREEAM International

Exemplary level

BREEAM International New Construction v.6.0 (2021)

BREEAM NOR

Exemplary level

BREEAM-NOR v.6.1 New Construction (2023)

EU Taxonomy

Pass

Regulation (EU) 2020/852 of the European Parliament and of the Council

LEED v4.1 BETA (outside U.S.)

Pass

LEED v4.1 BETA for Building Design and Construction (February 2024)



PARKY®

wood flooring's finest

Decospan nv, Industriezone Grensland
Lageweg 33, 8930 Meneen — België
tel. +32 56 52 88 49 — info@par-ky.com
www.par-ky.com

MADE IN BELGIUM

DECOSPAN.