


MASTER

LASTENBOEKTEKST

ALGEMEEN

Toplaag	Dikte: 0.6 mm
Afmetingen	Lengte: 1506 mm (59-5/16 inch) Breedte: 166 mm (6-1/2 inch) Dikte: 10 mm (3/8 inch)
Drager	High Density Fibreboard (HDF)
V-groeven	4 v-groeven (4x mini)
Glans	Super mat (3% +/-)
Structuur	Geborsteld
Tegenlaag	Echt hout
Densiteit	850 kg/m ³
Gewicht/m ²	9.5 kg
Kliksysteem	Unifit X [®]
Installatiemethode	Zwevend of verlijmd (cf Mapei installatie richtlijnen op de Parky website)
Standaard kleuren	Natural Oak premium, Ivory Oak premium, Sand Oak rustic light, Milk Oak premium, Sahara Oak rustic light, Burley Oak premium Andere kleuren op aanvraag

PRODUCTOPBOUW

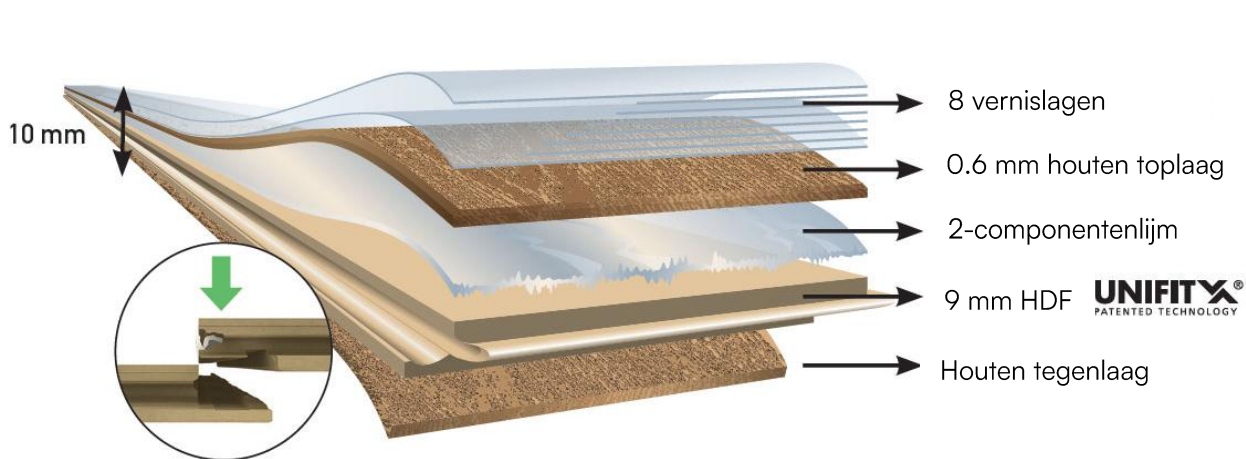

VERPAKKING

Doos	8 planken - oppervlakte 2.000 m ² (21.53 sq.ft) — bruto gewicht 17.3 kg (38.1 lbs)
Pallet	72 dozen - oppervlakte 144.00 m ² (1550 sq.ft) - bruto gewicht 1259 kg (2776 lbs)

TECHNISCHE SPECIFICATIES

Huishoudelijke gebruiksklasse	23
Commerciële gebruiksklasse	33
CE Certificatie	EN14342
Garantie	Residentieel gebruik: beperkte levenslange garantie Commercieel gebruik: 10 jaar
Formaldehyde-emissie	E1
PCP	≤ 5 ppm
Vloerverwarming	Geschikt
Vloerkoeling	Geschikt
Warmtedoorgangsweerstand	0.073 m²K/W
Warmtegeleidbaarheid	0.14 W/mK
Rookontwikkeling en brandveiligheid	Cfl-s1
Goed beheerde bossen	PEFC gecertificeerd (FSC® certificatie op aanvraag)
Onderhoud	Wekelijks onderhoud met 'Parky wood floor cleaner'



Eurofins Product Testing

French VOC Regulation		Degree of March 2011 (Dev1101903D) and Arrêté of April 2011 (DEVL 1104875A) modified in February 2012 (DEVL1133129A)
French CMR components	Pass	Regulation of April and May 2009 (DEVPO908633A and DEVPO910046A)
Italian CAM Edilizia	Pass	DM 23 giugno 2022 n. 256, GURI n. 183 del 6 agosto 2022
ABG/AgBB	Pass	Ausschuss zur gesundheitlichen Bewertung von Bauprodukten (June 2021)
Belgian Regulation	Pass	Royal decree of May 2014 (C-2014/24239)
Indoor Air Comfort	Pass	Indoor Air Comfort 9.0 of June 2023
Indoor Air Comfort Gold	Pass	Indoor Air Comfort GOLD 9.0 of June 2023
BREEAM International	Exemplary level	BREEAM International New Construction v.6.0 (2021)
BREEAM NOR	Exemplary level	BREEAM-NOR v.6.1 New Construction (2023)
EU Taxonomy	Pass	Regulation (EU) 2020/852 of the European Parliament and of the Council
LEED v4.1 BETA (outside U.S.)	Pass	LEED v4.1 BETA for Building Design and Construction (February 2024)



PARKY®
wood flooring's finest

Decospan nv, Industriezone Grensland
Lageweg 33, 8930 Menen — België
tel. +32 56 52 88 49 — info@par-ky.com
www.par-ky.com

MADE IN BELGIUM

DECOSPAN.